

08/13/25

exena.

Data sheet



EN ISO 20345:2011

EVEREST_BLACK
S3 CI WR SRC

SIZES FROM 35 TO 48

- UPPER:
Nubuk leather, water repellent treatment
- LINING:
Thinsulate and Breathable heat-sealed membrane
- SAFETY TOE CAP:
Non Metallic; polycarbonate, 200J
- PIERCE RESISTANCE:
Textile pierced proof footbed
- FOOTBED:
Removable, cushioned, antistatic
- OUTSOLE:
PU 2D antislip SRC
- MONDOPOINT®:
Natural comfort 11

Insole




Impulse

Technologies



Certifications

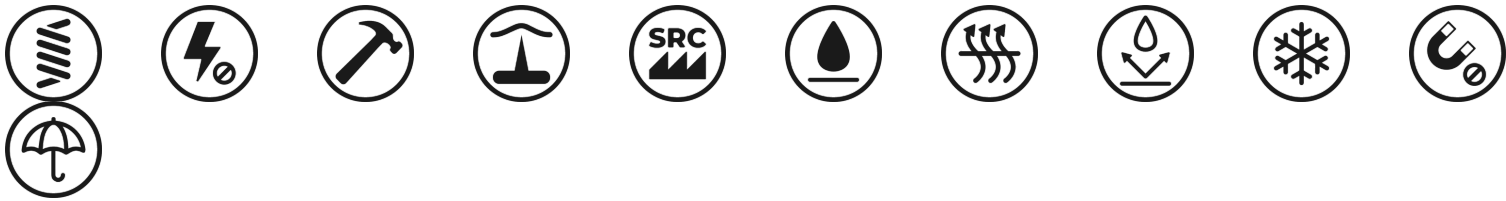

Intended use

- Constructions
- Industry & Workshop
- Petroleum
- Gardening & Farming